



LG G Pad F 7.0 Battery Replacement

This guide covers the replacement of a battery for the LG G Pad F 7.0.

Written By: Matt Kloos





TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — Battery




- Open up the SIM port, on the top right corner (screen face down).
- Press the SIM card (white plastic) to pop it out.
- Remove SIM card and set aside.

Step 2




- Use the plastic opening tool to pry the plastic backing off of the internal block. Start at the location with the SIM port to avoid damage to internal components.
- Do this by finding the seam between the edge of the screen and the plastic backing, and prying between the two.
- Work your way all the way around the edge of the screen, and remove the plastic backing when it is loose.

Step 3

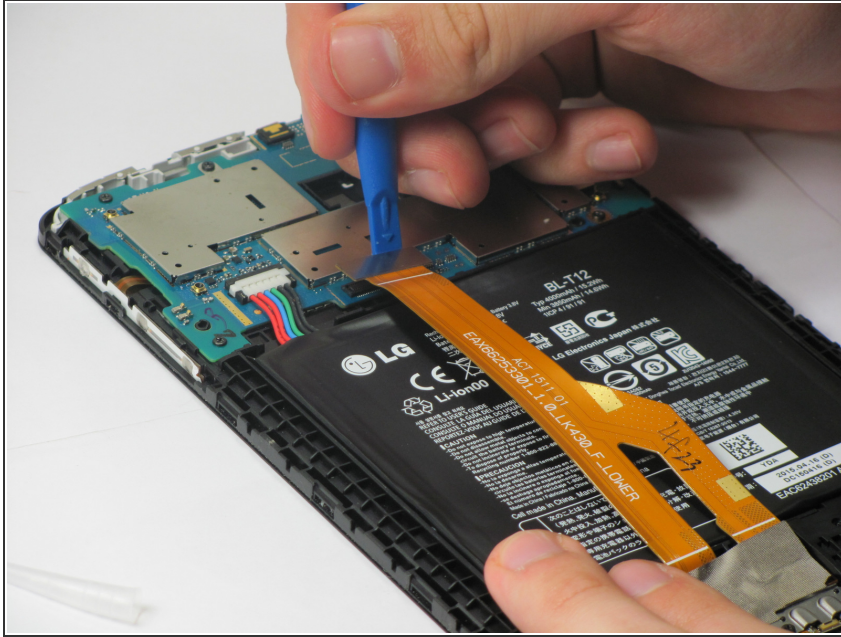

- Locate the large orange ribbon cable, pry off the side shown in the image.

Step 4

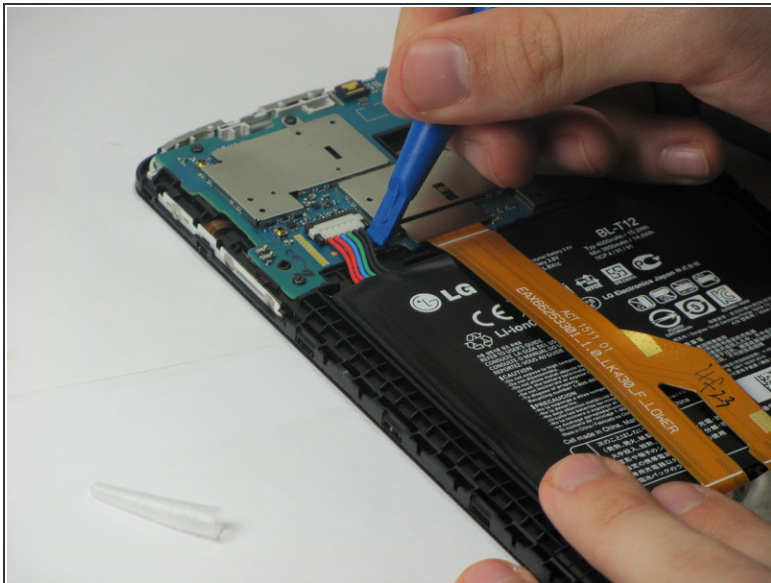

- Use the plastic opening tool to pry the multicolor wire cables off, applying force up away from the tablet.
- Use the plastic opening tool to pry up the battery. There is adhesive underneath the battery, so use a small amount of force. Work your way around the edge of the battery to pry it off.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-10 06:07:02 AM.